
# CURTAIN ROD 03

Curtain Rod 03 consists of a solid iron rod, tapered at the ends, supported by two brackets with visible riveted pointed finials. The rod slots onto the two surface-mounted brackets. Documented inside a 17th-century convent, this simple, traditional design was once widespread in homes and religious buildings.
Today, it is entirely hand-forged and hammered in Normandy, France.
Curtain Rod 03 is available in three lengths and can also be made to measure.

## DIMENSIONS

Curtain rod brackets :
INVSTR003
L 164 mm / l 51 MM / H 25 MM

Curtain rods :
INVTR002S
L 1100 mm / l 22 MM / DIAM. 16 mm
INVTR002M
L 1500 mm / l 26 MM / DIAM. 18 mm
INVTR002L
L 2000 mm / l 26 MM / DIAM. 18 mm

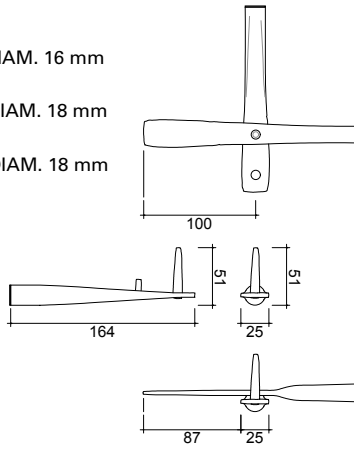


## MANUFACTURING LOCATION

Normandy region, France.

## MANUFACTURING PROCESS

Each Inventaire product is the result of French, manual, and artisanal craftsmanship.

## MATERIAL AND TECHNIQUE

Wrought iron hand-forged and hammered.
This is a “living” material whose appearance may change over time when exposed to hands, air, water, or other elements. These natural changes contribute to the unique character and aesthetic of each piece.

## USE

Indoor use. For outdoor use, please refer to the “Important Note” section.

## FINISHING

The artisan carries out the finishing process by hand, in three stages: first, a tinted patina is applied with a cloth, then worked with a fine brush, before a thin coat of finishing varnish is applied.

## INSTALLATION

The Rod Set 03 includes two rod supports (INVSTR003) and one rod: INVTR002S, INVTR002M, or INVTR002L.
The Rod Support 03 is compatible with the following rods:
02S: Length 110 cm
02M: Length 150 cm
02L: Length 200 cm
Weight of Curtain Rod Set 03S: 2.4 kg
Weight of Curtain Rod Set 03M: 3.6 kg
Weight of Curtain Rod Set 03L: 4.6 kg

The rod set is supplied with a choice of either two M8 expansion screws for hollow walls, or two M8 screws and wall plugs for solid walls.
Hollow walls include, in particular, plasterboard partitions, wooden panels, and walls or partitions made of hollow bricks, hollow concrete blocks, etc.
Solid walls include, in particular, walls or partitions made of solid bricks, stone or concrete, as well as solid wood elements (posts, beams, etc.).
The supplied fixing systems are designed to support a maximum load of 25 kg per system.
Before installation, the strength and condition of the supporting surface must be carefully checked.
Where necessary, particularly for heavier loads, the fixing system must be supplemented with additional reinforcement appropriate to the nature and characteristics of the supporting surface.

## IMPORTANT NOTE

We recommend carefully checking the compatibility of your installation and requirements before placing your order.
For outdoor use, a specific anti-corrosion treatment must be applied regularly after installation.
The dimensions of each item may vary from one piece to another, within tolerances defined by INVENTAIRE. These variations result from the handcrafted manufacturing process, with each stage introducing subtle differences inherent to the techniques used. These variations do not affect the functionality of the products.